


100255

U92/2E-AS Gloss Clear

PU

Material Construction

Surface	Conveying	Material	PU
		Profile	Glossy
		Color	Transparent
		Coefficient of friction	N/A
Tension Member	Material	Polyester Fabric	
	Plies	2	
Underside	Material	Polyester Fabric	
	Profile	PU Impregnated	
	Color	Transparent	
	Coefficient of friction	0.25	

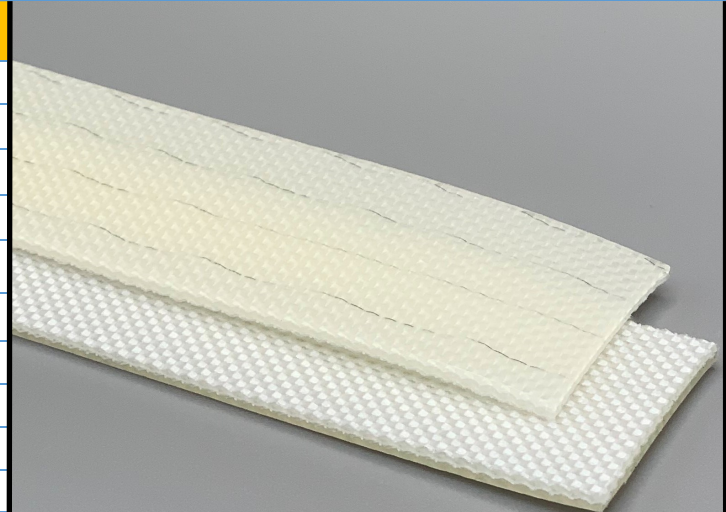

Technical Specifications

Overall Thickness	1.85 mm	0.073 in.
Weight	2.00 kg/m ²	0.41 lbs./ft ²
Maximum Width	3,200 mm	126.00 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	30.00 mm	1.181 in.
Minimum Back Flex	60.00 mm	2.362 in.
Load for 1% Extension (Dynamic)	6 N/mm	34.26 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-20/100 °C	-4/212 °F
Cover Durometer	92 Shore A	

Features

FDA	YES	Anti-Static	YES
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	YES
Anti-Microbial	NO		

Standard Fabrications


Longitudinal Splice	NO	Cleats	YES
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	YES	Footless Sidewall	NO
Edge Capped	YES	Plastic Spiral Lace	YES

Notes

2 Ply Monofilament with Gloss finish top cover having excellent abrasion and cut resistance. Excellent for make up tables, metal parts conveying, etc.

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Material Build

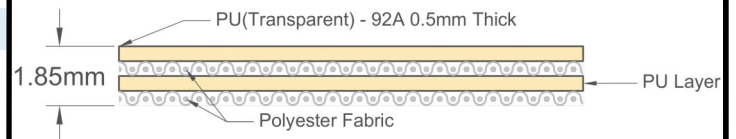

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
25	165°C 329°F	165°C 329°F	90 s	Top	Clear PU	Gloss/Rough Teflon

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
25	165°C 329°F	165°C 329°F	30 s	Top	Clear PU	Gloss/Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36 SP
Staple Lace	RS62

