


100605

U0/1E Green

PU

Material Construction

Surface	Conveying	Material	Polyester Fabric
		Profile	PU Impregnated
		Color	Green
		Coefficient of friction	0.25
Tension	Member	Material	Polyester Fabric
		Plies	1
Underside		Material	Polyester Fabric
		Profile	PU Impregnated
		Color	Green
		Coefficient of friction	0.25

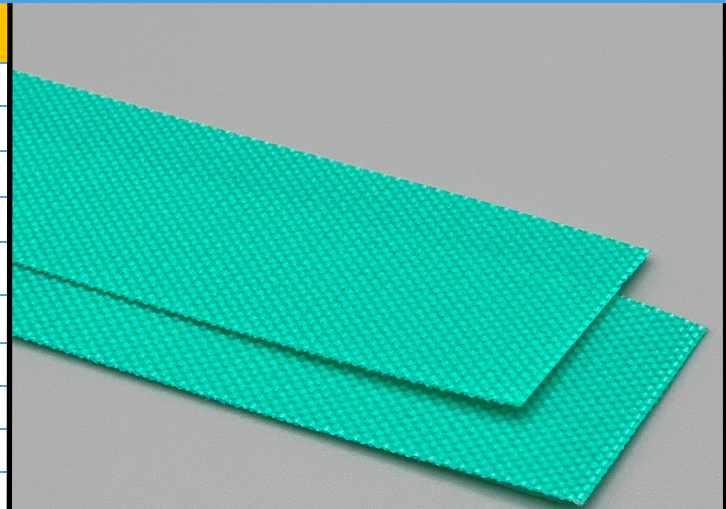

Technical Specifications

Overall Thickness	0.40 mm	0.016 in.
Weight	0.30 kg/m ²	0.06 lbs./ft ²
Maximum Width	2,200 mm	86.63 in.
Minimum Pulley/Nose Bar		
Diameter for Recommended Endless Splice	10.00 mm	0.394 in.
Minimum Back Flex	10.00 mm	0.394 in.
Load for 1% Extension (Dynamic)	3 N/mm	17.13 lbs./in.
Standard Tension		0.5 %
Product Operational Temperature Range	-30/100 °C	-22/212 °F
Cover Durometer	0 Shore A	

Features

FDA	YES	Anti-Static	NO
USDA Meat and Poultry	NO	Flame Retardant	NO
USDA Dairy	NO	Cross Rigid	YES
Anti-Microbial	NO		

Standard Fabrications


Longitudinal Splice	NO	Cleats	NO
Guide Applied to Cover	YES	Guide Applied to Bottom	YES
Footed Sidewall	NO	Footless Sidewall	NO
Edge Capped	NO	Plastic Spiral Lace	NO

Notes

1 Ply Monofilament - Impregnated

*Minimum pulley diameters can vary when mechanical lace is installed. Contact our technical team for any fabrication or application questions.

Material Build

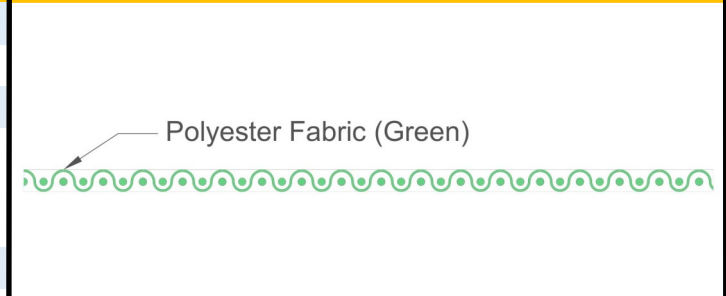

Splicing Instructions

High Speed Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	160°C 320°F	160°C 320°F	90 s	Middle	Clear PU	Matte/ Rough Teflon

Water Cooled Press Settings

Pressure (psi)	Temperature		Press Time	Foil Position	Foil	Release Top/Bot.
	Top	Bottom				
20	160°C 320°F	160°C 320°F	10 s	Middle	Clear PU	Matte/ Rough Teflon

*These settings are a guideline only, every press is different. Test splicing is recommended.

Standard Splices

Endless	Single Finger
Clipper Lace	UCM36 XSP w/ Folded Ends
Staple Lace	N/A

